


# BXUVC - Fire-resistance Ratings

[See General Information for Fire-resistance Ratings](#)

## Design No. W490

March 06, 2015

### Assembly Rating — 1 h

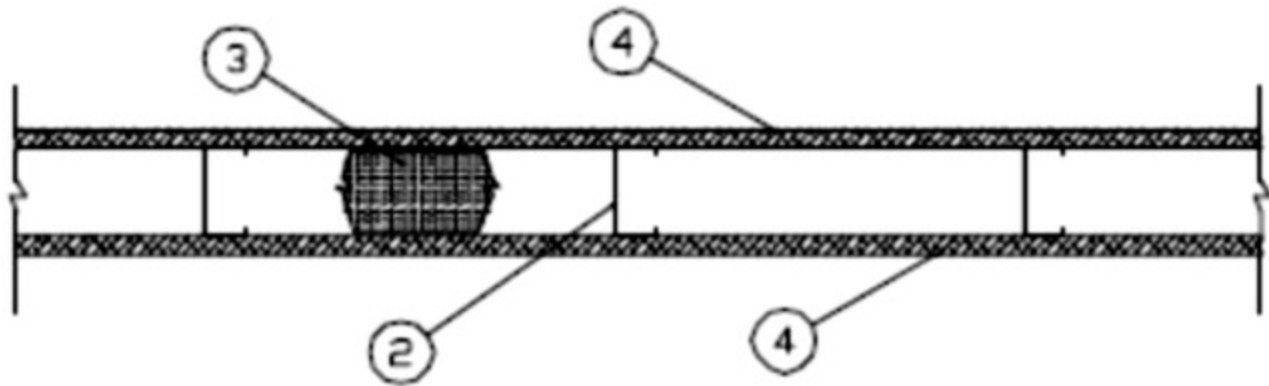

### Nonbearing Wall

1. **Floor and Ceiling Runners** — (Not Shown) — Channel shaped, fabricated from minimum 20 MSG (0.91 mm design thickness) corrosion-protected steel, minimum width to accommodate stud size, with minimum 32 mm long legs, attached to floor and ceiling with fasteners at maximum 610 mm OC.
2. **Steel Studs** — Channel shaped, fabricated from minimum 20 MSG (0.91 mm design thickness) corrosion-protected steel, minimum 92 mm wide with minimum 35 mm flanges and minimum 9.5 mm return, spaced at maximum 610 mm OC. Studs to be cut 19 mm less than assembly height.
3. **Batts and Blankets** — ULC labeled mineral wool batts, friction fitted between studs and runners. Minimum 64 mm thick and minimum 32 Kg/m<sup>3</sup> density.
- 4. **Building Units** — (BZXXC). 1220 mm wide magnesium oxide panels. Minimum 12 mm thick panels secured to steel studs with 41 mm. long, #8 self- drilling, cement board wafer head screws. Screws spaced 200 mm OC around board perimeter starting 102 mm from board corners and 455 mm OC in the field of the board. Vertical joints on opposite sides of the wall staggered a minimum of 610 mm.

**MBP-IP L L C** — Magnum Board

#### Cookies on UL Solutions

5. **Joint Tape and Compound** — (Not Shown) — Vinyl, dry, or premixed joint compound applied in two coats to board joints and screw heads. Fiberglass tape, nominal 30 mm wide, embedded in first layer of compound over all board joints.

We use cookies to personalize content and ads, to provide social media features and to analyze our traffic. We also share information about your use of our site with our social media, advertising and analytics partners. [Learn more](#)

[Last Updated](#) on 2015-03-06

Cookies Settings

Reject All

Accept All Cookies

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL Solutions' Follow - Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL Solutions' Follow - Up Service. Always look for the Mark on the product.

UL Solutions permits the reproduction of the material contained in Product iQ subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from Product iQ with permission from UL Solutions" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "©2025 UL LLC."

## Cookies on UL Solutions

We use cookies to personalize content and ads, to provide social media features and to analyze our traffic. We also share information about your use of our site with our social media, advertising and analytics partners. [Learn more](#)